

M600JP Hybrid Telescopic Boom Lift



SPECIFICATIONS

Performance:

Platform Height (max.)	18.29m
Working Height	20.29m
Platform Rotation Angle	180°
Jib Plus Rotation Angle	180°
Jib Raise Angle	89°
Jib Lower Angle	56°
Jib Articulation Range	145°
Maximum Horizontal Outreach	13.23m
Platform Capacity	230kg
Slewing Angle	400° Non-continuous
Continuous Slew	No

Dimensions:

Stowed Length	10.15m
Stowed Height	2.57m
Overall Width	2.44m
Wheelbase	2.74m
Ground Clearance	0.30m
Platform Width	1.83m
Platform Length	0.76m
Overall Jib Length	1.24m
Tailswing	1.22m
Axle Oscillation Standard	Std

Power:


Power Source	Electric DC
Engine Make	Kubota
Engine Model	OC 60
Engine Power	5kW
DC Voltage	48V
DC Power	415 Amp h
Genset	Mechron 55A
Auxiliary Power	Hand Pump

Travel:

Tyre Size	36/14 LL-22.5
Tyre Type	Urethane Filled/Non-marking
Inside Turn Radius	1.22m
Outside Turn Radius	4.64m
Drive Speed Elevated	0.8km/h
Gradeability with AWD	45%
Drive Speed - AWD	5.0km/h
Maximum Ground Bearing Pressure	3.7kg/cm ²

Weights and Capabilities:

Fuel Tank Capacity	49.21 Ltr
Hydraulic Tank Capacity	56.78 Ltr
Operating Weight	7,702kg

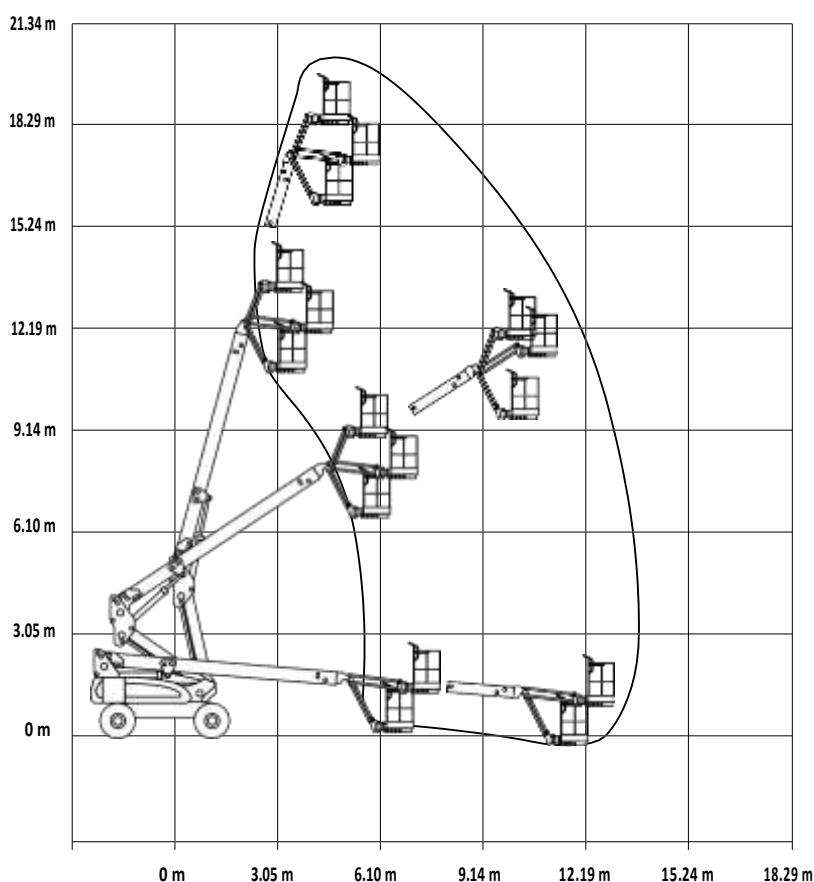

KEY SELLING POINTS

- Smooth control, proportional electric drive, with two speed ranges
- Proportional lift and swing controls at the platform
- 4 wheel drive assist with front (steer) hydraulic drive motors with constant traction speed sensor
- Oscillating front steer axle to assist front wheel traction
- Jib boom and basket rotate
- Smooth control, proportional electric drive, with two speed ranges

- Proportional lift and swing controls at the platform
- 4 wheel drive assist with front (steer) hydraulic drive motors with constant traction speed sensor
- Oscillating front steer axle to assist front wheel traction
- Jib boom and basket rotate
- Jib PLUS feature allows jib boom to rotate either side of centre
- Cylinder boots protect cylinder rods from overspray and contaminants
- Non-marking urethane filled tyres
- Multi axis 4 degree level sensor
- Plug in JLG analyser at platform and base to indicate system functions for servicing and adjustment
- On "M" version, a Kubota single cylinder diesel engine to operate 55 Amp Mechron charger when battery voltage drops below a prescribed level. Charge on the go